

SMART 300

Throughput	Up to 80 tests/hour
Modes of Operation	Random, Batch and STAT
Sample Loading	Up to 25 sample tubes Continuous loading, STAT available
Reagent Loading	32 reagents on board (12 test items can be simultaneous) Continuous loading
Reaction Cuvette	≤96 (8*12) Continuous loading
Sample Probe Carryover	<1.0 parts per million
Linear Correlation	≥0.999
Accuracy	CV≤3%
Other Features	Liquid level detection, plugged needle alarm, air suction alarm Real-time monitoring and alarm of reagent waste overload indication, alarm Real-time self diagnosis, self repair, self protect Maintenance function Optional ratio for sample dilution
Software System	Graphic user interface, touch screen Supporting LIS bidirectional data transmission round-the-clock online remote technical support and maintenance
Weight	35kg
Dimensions(H*W*D)	500*422*568mm

Contact Us


Address: 6th, 2-1-2 Jupiter Technology Building, High-tech Park in Northern, Chongqing, China

Tel: 86-23-6305 3515 / 6308 3850 Fax: 86-23-6305 3515

Web: www.key-smile.com E-mail: keysmile@key-smile.com



**Automatic
Chemiluminescence Immunoassay Analyzer
SMART 300**

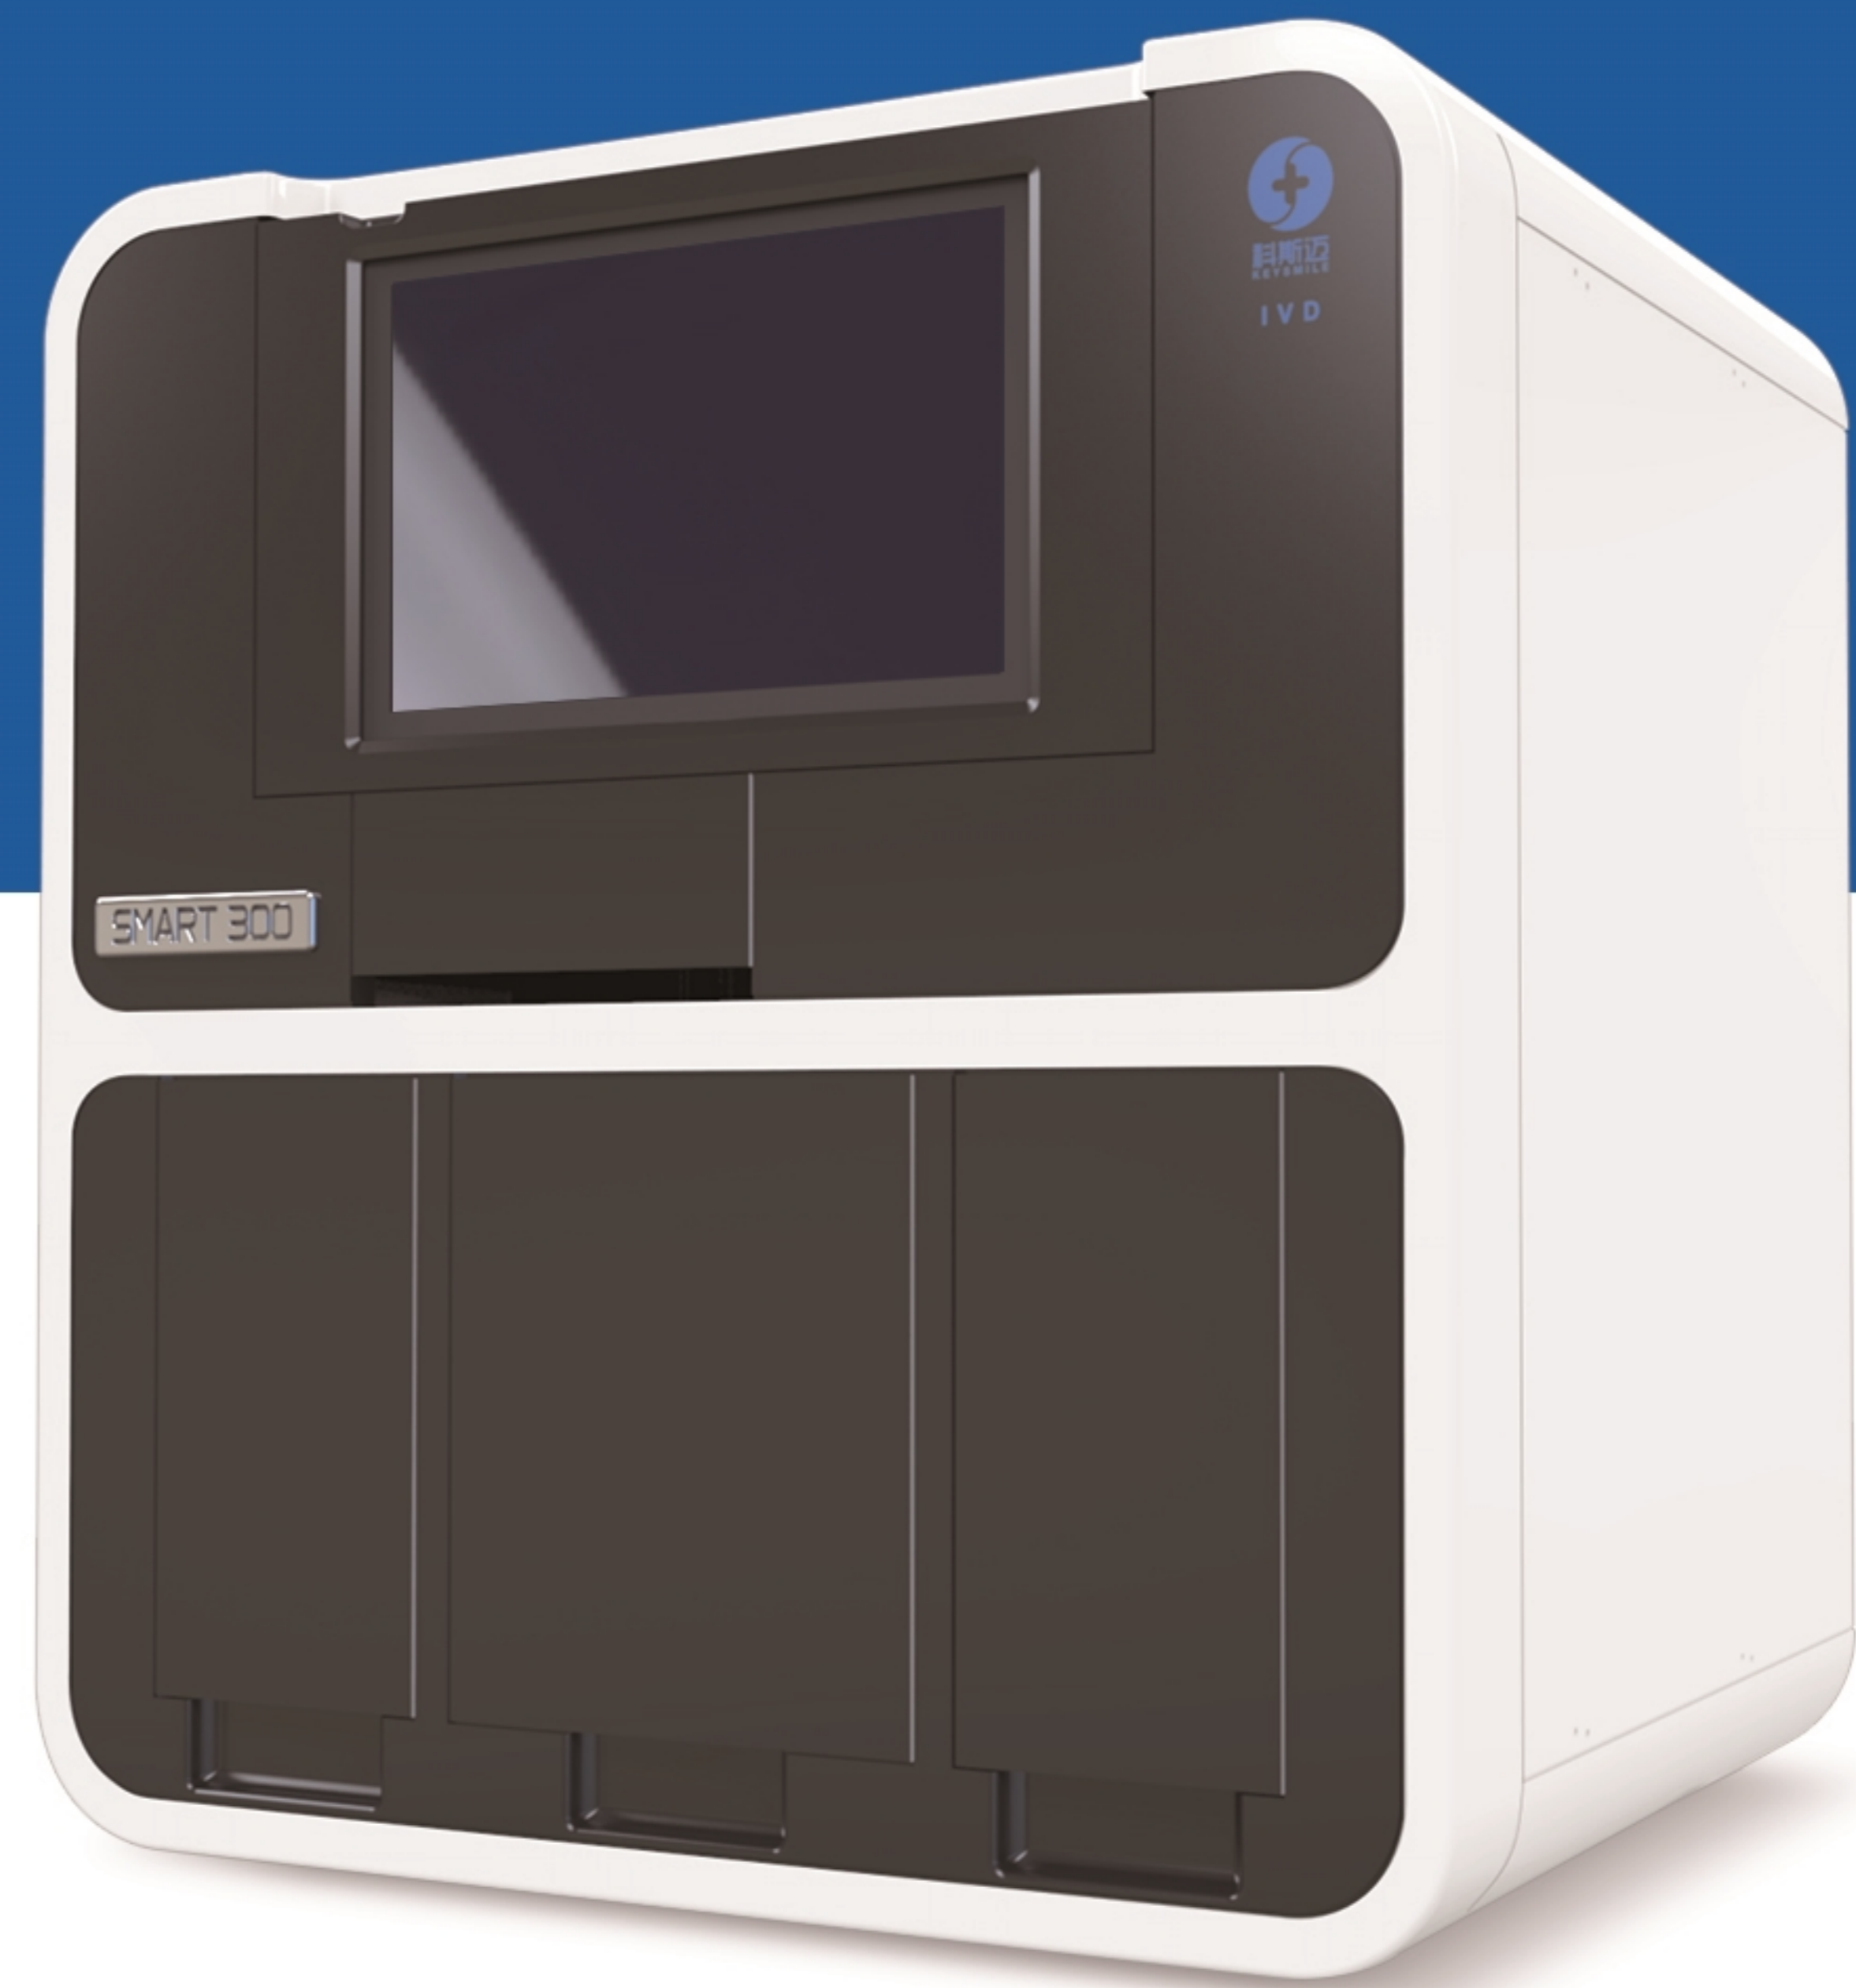

Professional